RecsunSolar

N-TOPCON
Tunnel Oxide Passivating Contact

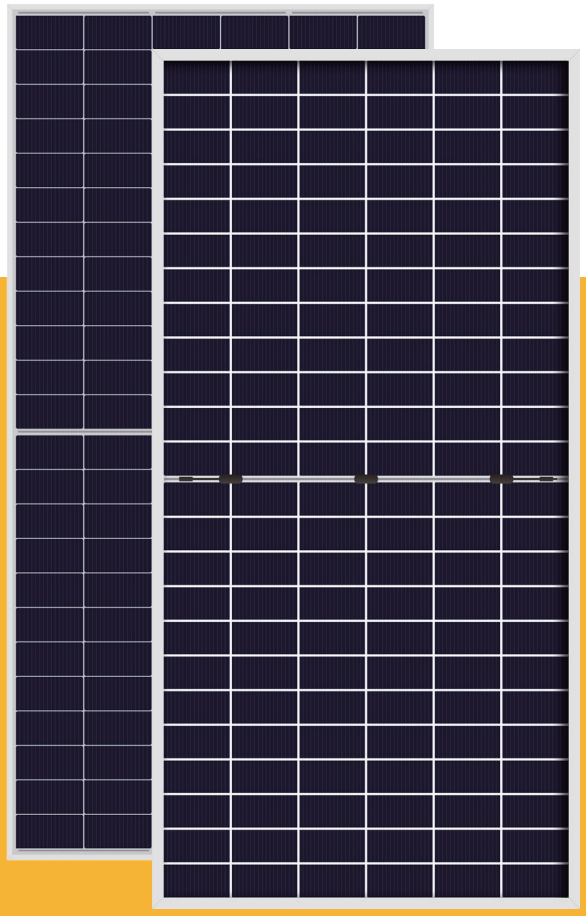

550W-570W

M10 144HC 16BB DOUBLE-GLASS

Maximum Power Output	Maximum Module Efficiency	Power Output Tolerance
570W	**22.10%**	**0-+3%**

KEY FEATURES

High Efficiency
Leading module efficiency in industry, the highest efficiency up to 23.82%

Excellent Appearance and Performance
Bifacial solar cell, symmetrical design, low risk of micro-crack

High Reliability
Passed 3*IEC standard test, 15 years materials warranty, 30 years output linear power warranty

Excellent Rear Side Power Generation
Bifaciality is up to 80%, up to 30% more energy yield than conventional modules

Better low irradiance performance
Higher power output even under low irradiance environments like on cloudy or foggy days

Extensive Application Scenes
More extensive application scenes, such as snow field, vertical installation, high humidity, strong wind and desert

Product and Quality Certifications

IEC 61215, IEC 61730
ISO 9001: Quality Management System
ISO 14001: Environment Management System
ISO 45001: Occupational Health and Safety Management System
IEC 62716, IEC 61701: Ammonia, Salt mist corrosion test
IEC TS 62804-1, IEC 60068-2-68: PID test, Dust and Sand test

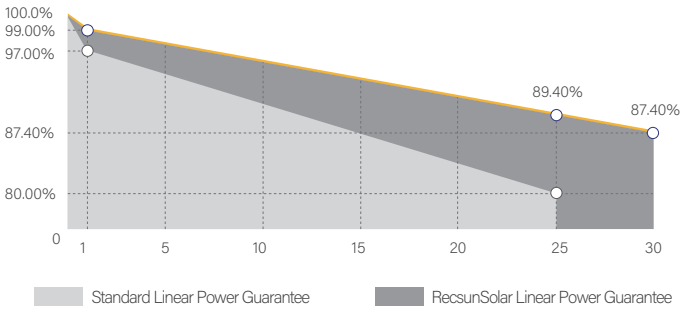

Leading Product and Power Warranty

-1.00%1st-Year Degradation -0.40%Annual Degradation 15Materials and Workmanship Warranty 30Linear Power Warranty

ENGINEERING DRAWING (mm)

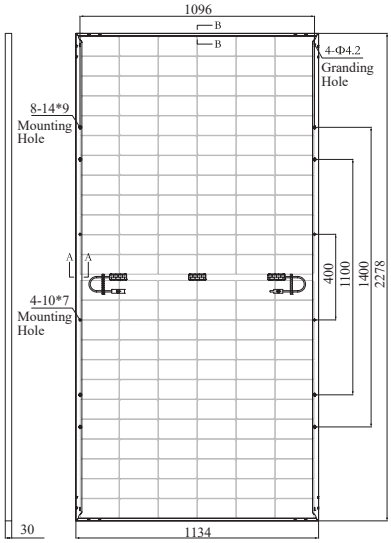



A Long Frame



B Short Frame

CHARACTERISTIC CURVES (560W)

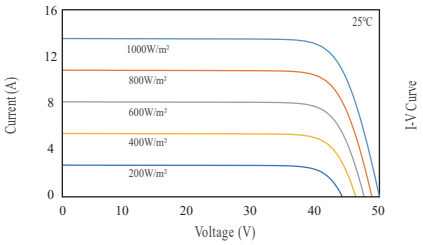

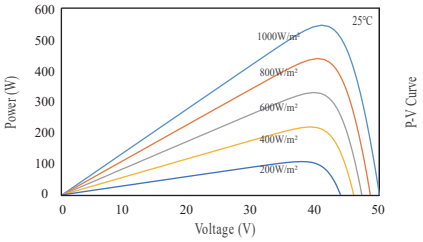

ELECTRICAL PARAMETERS (Test Condition is Based on the Front Side)

Module Type	N550H144M10D		N555H144M10D		N560H144M10D		N565H144M10D		N570H144M10D	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Nominal Max. Power(Pmax/W)	550	416	555	420	560	424	565	428	570	432
Open Circuit Voltage(Voc/V)	49.85	46.97	50.05	47.11	50.25	47.25	50.45	47.39	50.65	47.53
Short Circuit Current(Isc/A)	14.12	11.18	14.22	11.23	14.32	11.28	14.42	11.33	14.52	11.38
Maximum Power Voltage(Vmp/V)	41.00	39.40	41.12	39.60	41.24	39.80	41.36	40.00	41.48	40.20
Maximun Power Current(Imp/A)	13.42	10.56	13.50	10.62	13.58	10.68	13.66	10.74	13.74	10.80
Efficiency(%)	21.30%		21.50%		21.70%		21.90%		22.10%	

STC: Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5, Average efficiency reduction of 4.5% at 200W/m².
NOTC: Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5, Wind Speed = 1 m/s.

MECHANICAL PARAMETERS

Cell Type	182*91mm, 144HC	Connector	MC4 Original/Compatible
Module Size&Weight	2278×1134×30mm, 32Kg	Junction Box	IP68, 3 Bypass Diodes
Glass	2.0mm AR Coated Heat Strengthened Glass	Frame	Anodized Aluminium Alloy(Sliver)
Backsheet	2.0mm Ultra-Clear Float Glass	Cable	4mm², Cable Length 300mm(customized)

TEMPERATURE COEFFICIENTS

Nominal Operating Cell Temperature	45°C(±2°C)	Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Pmax	-0.310%/°C	Temperature Coefficient of Isc	+0.046%/°C

BACKSIDE POWER GAIN 10% FOR REFERENCE

Module Frontside Power(W)	550	555	560	565	570
Nominal Max. Power(Pmax/W)	605.0	610.5	616.0	621.5	627.0
Open Circuit Voltage(Voc/V)	49.85	50.05	50.25	50.45	50.65
Short Circuit Current(Isc/A)	15.59	15.68	15.78	15.87	15.97
Max. Power Voltage(Vmp/V)	41.00	41.12	41.24	41.36	41.48
Max. Power Current(Imp/A)	14.76	14.85	14.94	15.03	15.12

OPERATING PARAMETERS

Max. System Voltage	DC1500V
Power Tolerance	0 - +3%
Operating Temperatue	-40°C - +85°C
Max. Fuse Rated Current	30A
Front Static Load	Snow 5400Pa, Wind 2400Pa
Packaging Data	36PCS/Pallet; 720PCS/40HQ

RecsunSolar

Tel: +86 519 86261678 Email: info@recsunsolar.com Web: www.recsunsolar.com
Recsun Solar Energy Co.,Ltd All rights reserved. Specifications included in this datasheet are subject to change without notice.