

620W-640W

G12R 132HC BIFACIAL DUAL-GLASS

KEY FEATURES

- 
High Efficiency
Leading module efficiency in industry, the highest efficiency up to 23.82%
- 
Excellent Appearance and Performance
Bifacial solar cell, symmetrical design, low risk of micro-crack
- 
High Reliability
Passed 3*IEC standard test, 15 years materials warranty, 30 years output linear power warranty
- 
Excellent Rear Side Power Generation
Bifaciality is up to 80%, up to 30% more energy yield than conventional modules
- 
Better low irradiance performance
Higher power output even under low irradiance environments like on cloudy or foggy days
- 
Extensive Application Scenes
More extensive application scenes, such as snow field, vertical installation, high humidity, strong wind and desert

Maximum Power Output

640W

Maximum Module Efficiency

23.69%

Power Output Tolerance

0-+5W

Product and Quality Certifications

IEC 61215, IEC 61730


ISO 9001: Quality Management System

ISO 14001: Environment Management System

ISO 45001: Occupational Health and Safety Management System



IEC 62716, IEC 61701: Ammonia, Salt mist corrosion test

IEC TS 62804-1, IEC 60068-2-68: PID test, Dust and Sand test

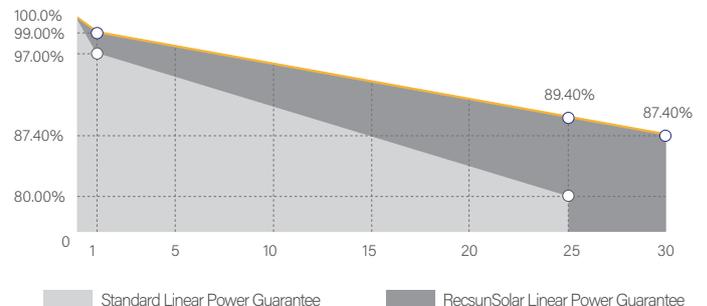


Leading Product and Power Warranty



-1.00% 1st-Year Degradation -0.40% Annual Degradation 15 Materials and Workmanship Warranty 30 Linear Power Warranty

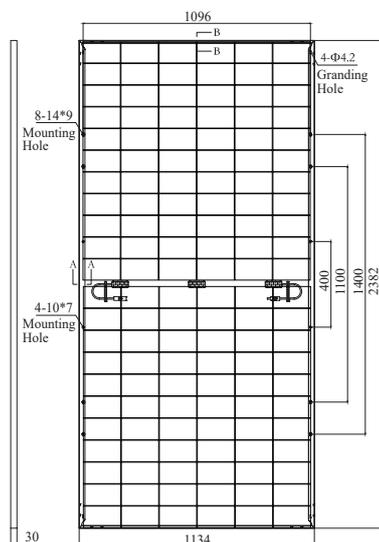

A Long Frame



B Short Frame

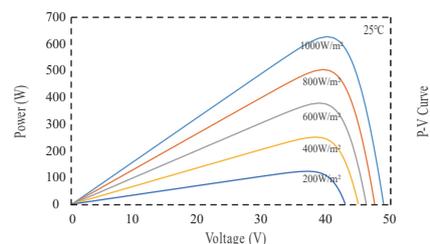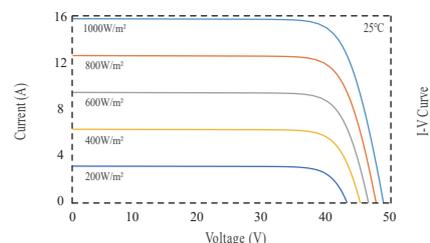

ELECTRICAL PARAMETERS (Test Condition is Based on the Front Side)

Module Type	N620H132G12RD		N625H132G12RD		N630H132G12RD		N635H132G12RD		N640H132G12RD	
	STC	BNPI								
Nominal Max. Power(Pmax/W)	620	687	625	693	630	698	635	703	640	708
Open Circuit Voltage(Voc/V)	49.32	49.40	49.52	49.60	49.72	49.80	49.92	50.00	50.12	50.20
Short Circuit Current(Isc/A)	15.97	17.69	16.02	17.75	16.07	17.81	16.12	17.87	16.17	17.93
Maximum Power Voltage(Vmp/V)	41.11	41.19	41.31	41.39	41.51	41.59	41.71	41.79	41.91	41.99
Maximum Power Current(Imp/A)	15.09	16.68	15.14	16.73	15.19	16.78	15.24	16.83	15.29	16.88
Efficiency(%)	22.95%		23.14%		23.32%		23.51%		23.69%	

STC: Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5, Average Efficiency Reduction of 4.5% at 200W/m².
 BNPI: Front Irradiance = 1000 W/m², Rear Irradiance = 135 W/m², Ambient Temperature = 25°C, AM = 1.5, Wind Speed = 1 m/s.

MECHANICAL PARAMETERS

Cell Type	182*210mm, 132HC	Connector	MC4 Original/Compatible
Module Size&Weight	2382×1134×30mm, 33.5Kg	Junction Box	IP68, 3 Bypass Diodes
Glass	2.0mm AR Coated Heat Strengthened Glass	Frame	Anodized Aluminium Alloy(Sliver)
Backsheet	2.0mm Ultra-Clear Float Glass	Cable	4mm ² , Cable Length 300mm(customized)

TEMPERATURE COEFFICIENTS

Nominal Operating Cell Temperature	45°C(±2°C)	Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Pmax	-0.290%/°C	Temperature Coefficient of Isc	+0.046%/°C

REAR SIDE POWER GAIN 10% FOR REFERENCE

Front Side Power(W)	620	625	630	635	640
Nominal Max. Power(Pmax/W)	682	687.5	693	698.5	704
Open Circuit Voltage(Voc/V)	49.32	49.52	49.72	49.92	50.12
Short Circuit Current(Isc/A)	17.56	18.35	19.15	19.95	20.75
Max. Power Voltage(Vmp/V)	41.11	41.31	41.51	41.71	41.91
Max. Power Current(Imp/A)	16.59	16.64	16.69	16.75	17.12

OPERATING PARAMETERS

Max. System Voltage	DC1500V
Power Tolerance	0 - +5W
Operating Temperature	-40°C - +85°C
Max. Fuse Rated Current	30A
Front Static Load	Snow 5400Pa, Wind 2400Pa
Packaging Data	37PCS/Pallet; 740PCS/40HQ